


# Testing Packet Time and Frequency



---

A Leading Provider of Smart, Connected and Secure Embedded Control Solutions



SMART | CONNECTED | SECURE

**Lee Cosart**  
March 2023

# Introduction

- **Frequency Transport**



- One-way: forward and reverse packet streams can be used separately
- Asymmetry is irrelevant
- Stable frequency needed
- PRC (primary reference clock) needed
- GNSS/GPS antenna cable compensation/calibration not needed
- GSM frequency backhaul (50 ppb) is example technology

- **Time Transport**

- Two-way: forward and reverse packet streams used together
- Asymmetry is critical
- Stable time and frequency needed
- PRTC (primary reference time clock) or ePRTC (enhanced PRTC) needed
- GNSS/GPS antenna cable compensation/calibration needed
- LTE-TDD time/phase (1.5  $\mu$ sec) is an example technology


# Testing Frequency “Physical” vs. “Packet”

- **“TIE” (Single Point Measurement)** Measurements are made at a single point – a single piece of equipment in a single location – a phase detector with reference – is needed

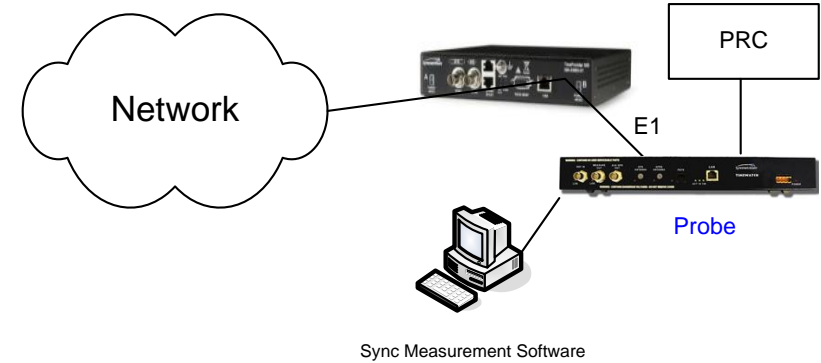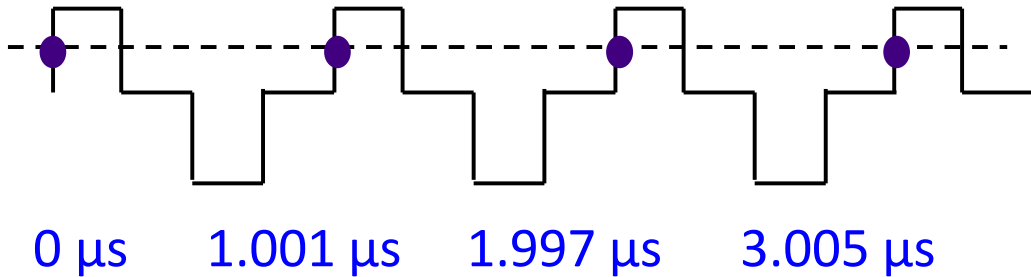



- **“PDV” (Dual Point Measurement)** Measurements are constructed from packets time-stamped at two points – in general two pieces of equipment, each with a reference, at two different locations – are needed

	Timestamp A	Timestamp B
F	1233166476.991204496	1233166476.991389744
R	1233166476.980521740	1233166476.980352932
F	1233166477.006829496	1233166477.007014512
R	1233166476.996147084	1233166476.995977932
F	1233166477.022454496	1233166477.022639568
R	1233166477.011771820	1233166477.011602932

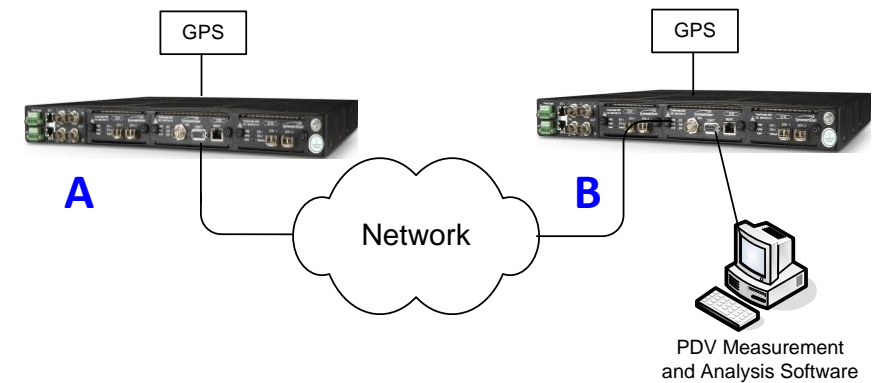

# Testing Time “Physical” vs. “Packet”

- **“1 PPS” (Single Point Measurement)** Measurements are made at a single point – a single piece of equipment in a single location – a phase detector with reference – is needed

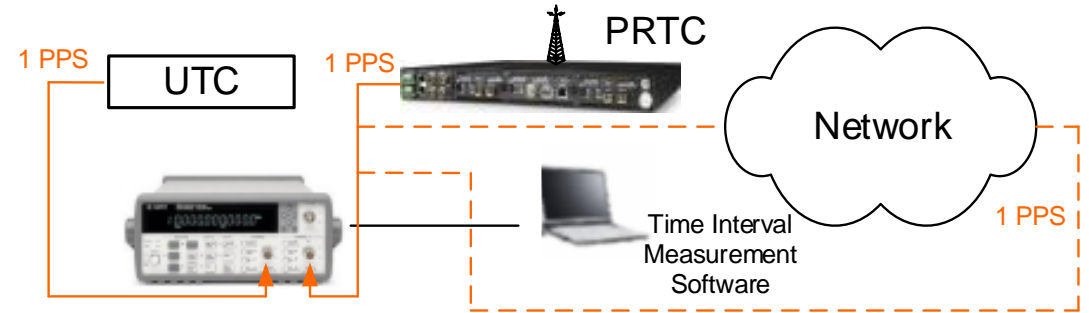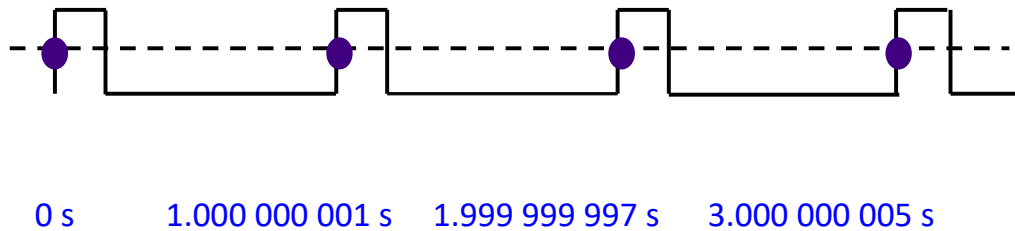


- **“Packet” (Dual Point Measurement)** Measurements are constructed from packets time-stamped at two points – in general two pieces of equipment, each with a reference, at two different locations – are needed

Timestamp A


Timestamp B

F	1286231440.883338640	1286231440.883338796
R	1286231441.506929352	1286231441.506929500
F	1286231441.883338640	1286231441.883338796
R	1286231442.506929352	1286231442.506929500
F	1286231442.883338640	1286231442.883338796
R	1286231443.506929352	1286231443.506929516

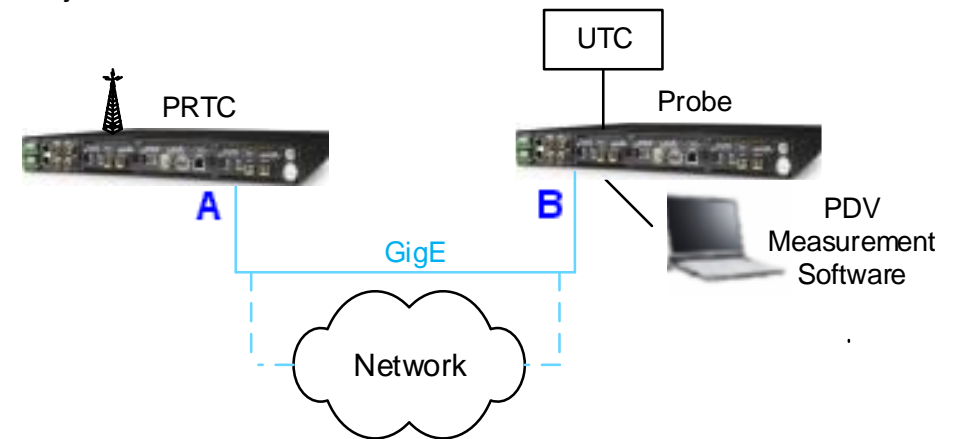

# Grandmaster Test PPS and Packet Probe

Physical 1 PPS signal measurement and packet signal tested with probe match

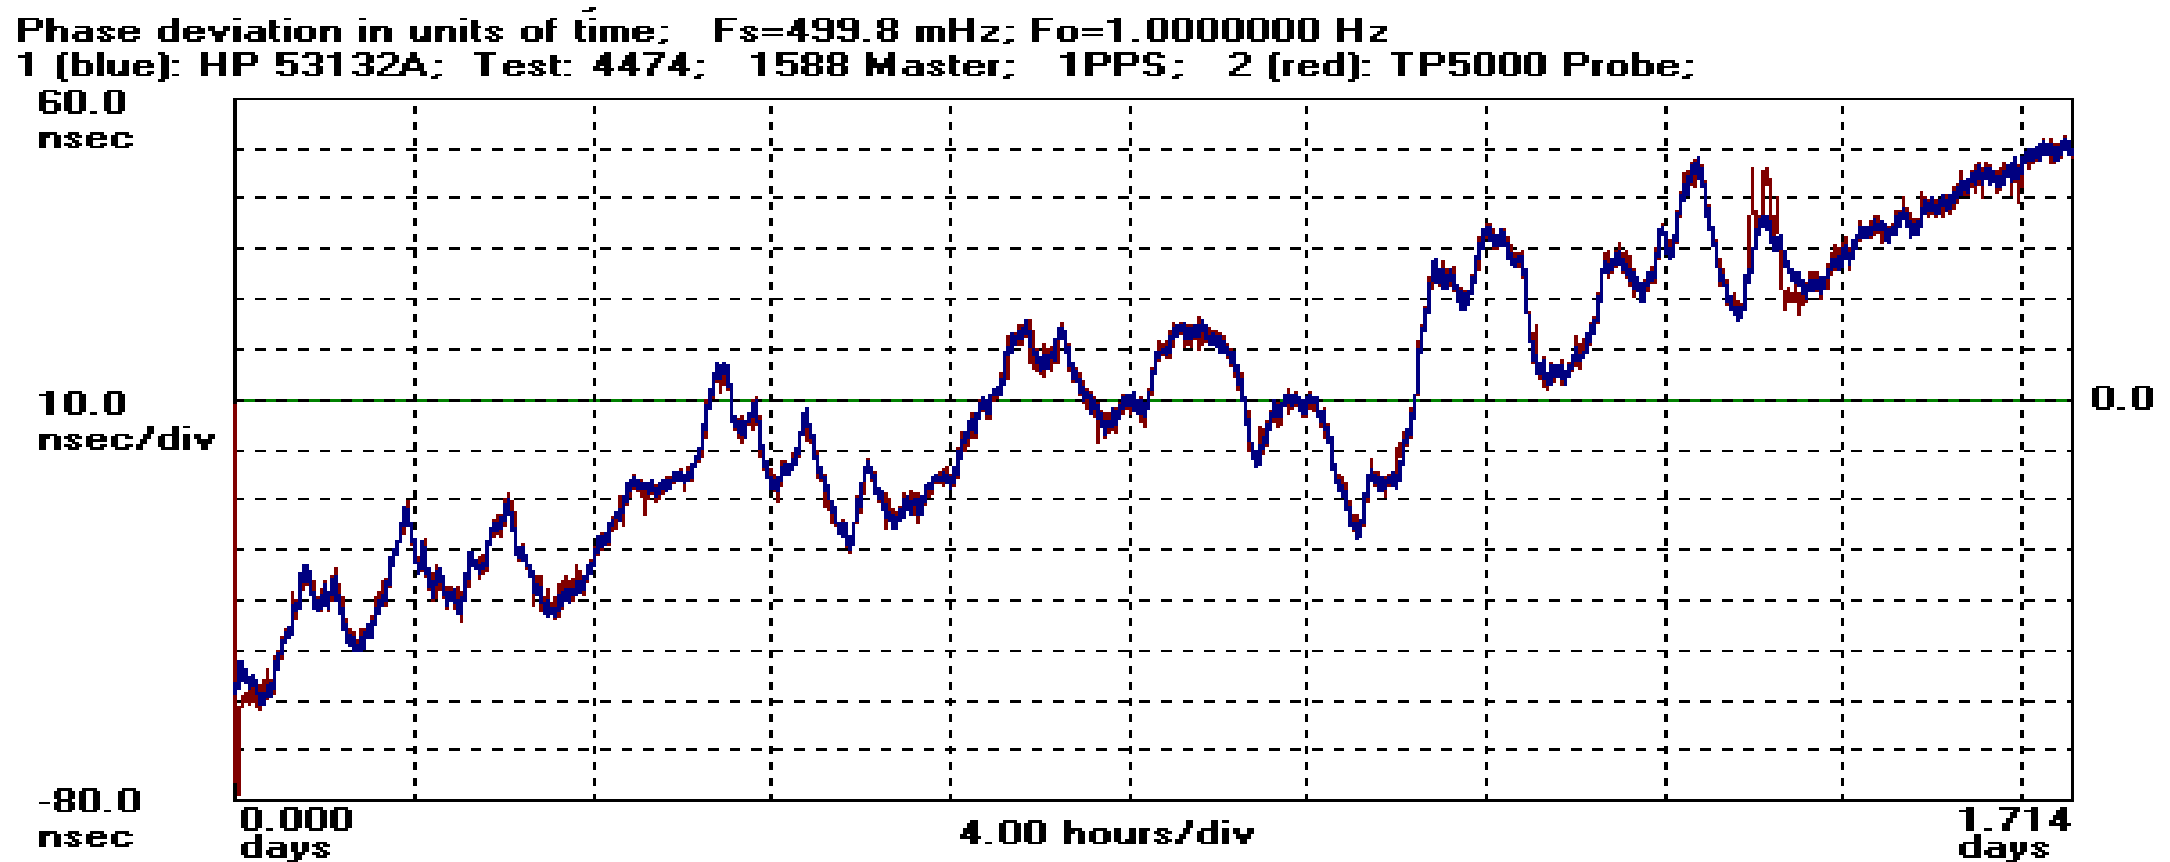

# “TIE” Analysis vs. “PDV” Analysis

## “TIE” Analysis (G.810)

- Phase (TIE)
- Frequency accuracy
- Dynamic frequency
- MTIE
- TDEV

## “PDV” Analysis (G.8260)

- Phase (PDV)
  - Histogram/PDF\*, CDF\*\*, statistics
  - Dynamic statistics
  - MATIE/MAFE
  - TDEV/minTDEV/bandTDEV
- \* PDF = probability density function  
\*\* CDF = cumulative distribution function

- ▶ The importance of raw TIE/PDV:
  - Basis for frequency/statistical/MTIE/TDEV analysis
  - Timeline (degraded performance during times of high traffic?)
  - Measurement verification (jumps? offsets?)

# Stability Metrics

- **Traditional Clock Metrics**

- ADEV, TDEV, MTIE
- Traditionally applied to oscillators, synchronization interfaces
- Also applied to lab packet equipment measurements


GM, BC

- **Frequency Transport Packet Metrics**

- minTDEV, MAFE, MATIE
- Applied to one-way packet delay data
- FPP/FPR/FPC (floor packet percentage/rate/count)

- **Time Transport Packet Metrics**

- pktselected2wayTE
- Applied to two-way packet delay data
- Assesses link asymmetry

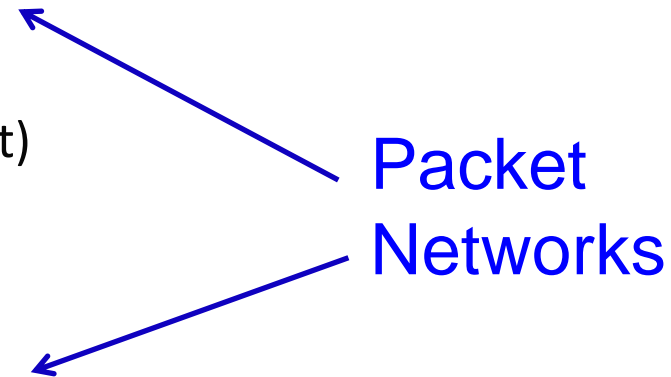

# Stability Metrics for PDV

- **Packet Selection Processes**

1) **Pre-processed:** packet selection step prior to calculation. Example: **TDEV** (*PDVmin*) where *PDVmin* is a new sequence based on minimum searches on the original PDV sequence

2) **Integrated:** packet selection integrated into calculation. Example: **minTDEV** (*PDV*)

- **Packet Selection Methods**

- Minimum:  $x_{\min}(i) = \min[x_j] \text{ for } (i \leq j \leq i + n - 1)$

- Percentile:  $x'_{pct\_mean}(i) = \frac{1}{m} \sum_{j=0}^b x'_{j+i}$

- Band:  $x'_{band\_mean}(i) = \frac{1}{m} \sum_{j=a}^b x'_{j+i}$


- Cluster:  $x(n\tau_0) = \frac{\sum_{i=0}^{(K-1)} w((nK+i)\tau_p) \cdot \phi(n,i)}{\sum_{i=0}^{(K-1)} \phi(n,i)}$   $\phi(n,i) = \begin{cases} 1 & \text{for } |w(nK+i) - \alpha(n)| < \delta \\ 0 & \text{otherwise} \end{cases}$



# Packet Selection Windows

- **Windows**




- *Non-overlapping windows* (next window starts at prior window stop)
- *Skip-overlapping windows* (windows overlap but starting points skip over N samples)
- *Overlapping windows* (windows slide sample by sample)

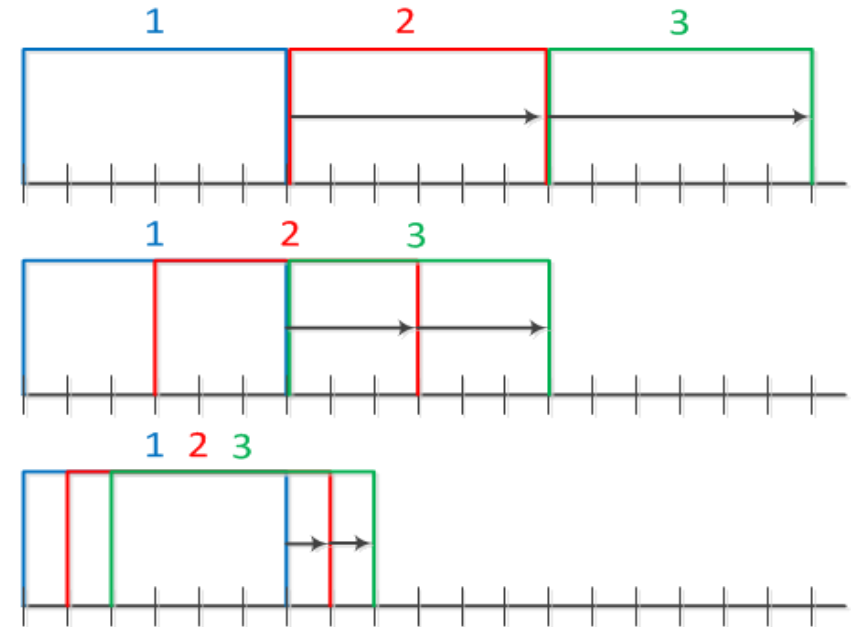

- **Packet Selection Approaches**

- Select X% fastest packets (e.g. 2%)
- Select N fastest packets (e.g. 10 fastest packets in a window)
- Select all packets faster than Y (e.g. all packets faster than 150  $\mu$ s)


# G.8260 Appendix I Metrics

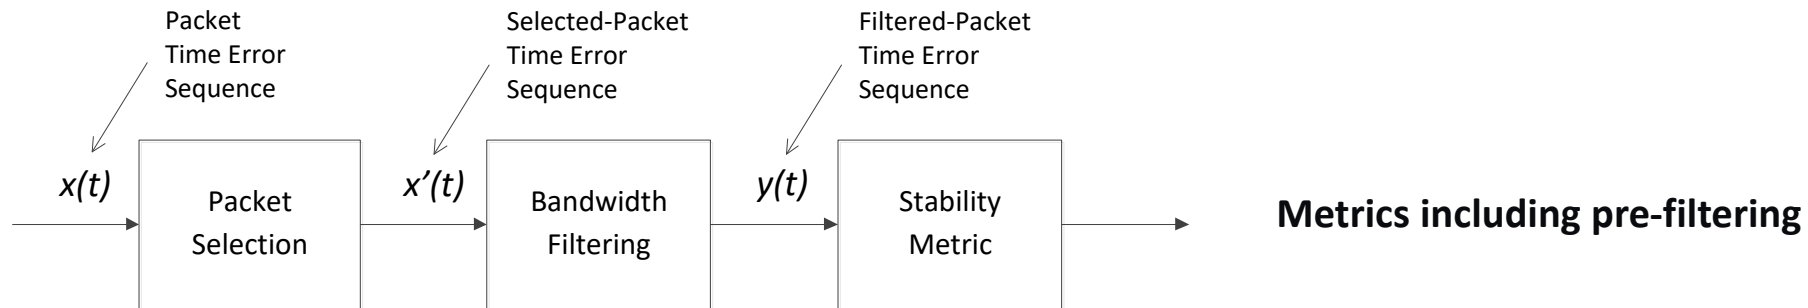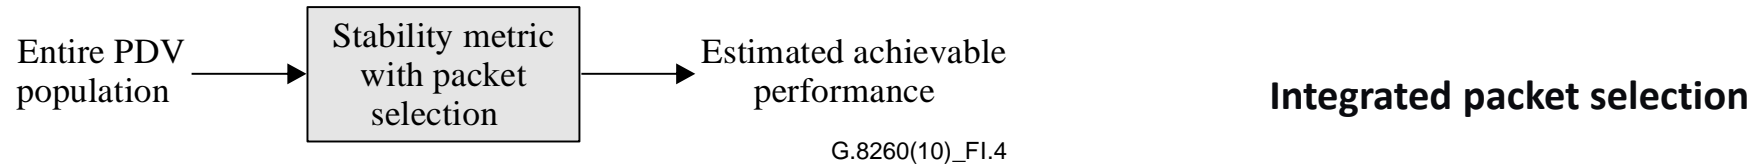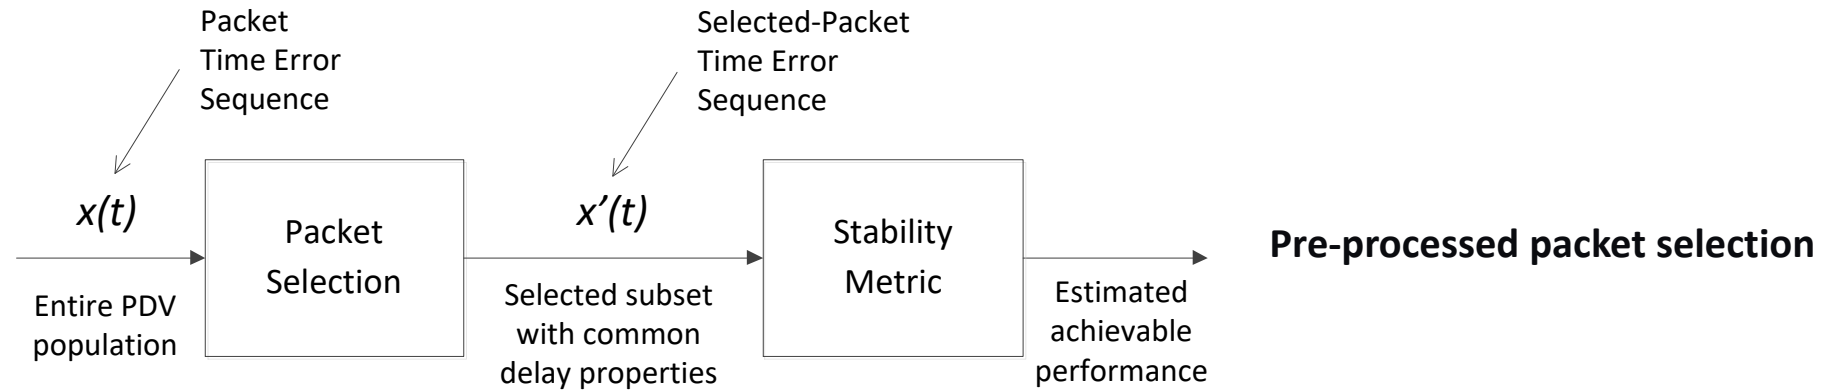


FPC, FPR, FPP: Floor Packet Count/Rate/Percent

PDV metrics studying minimum floor delay packet population

# Packet Delay Distribution

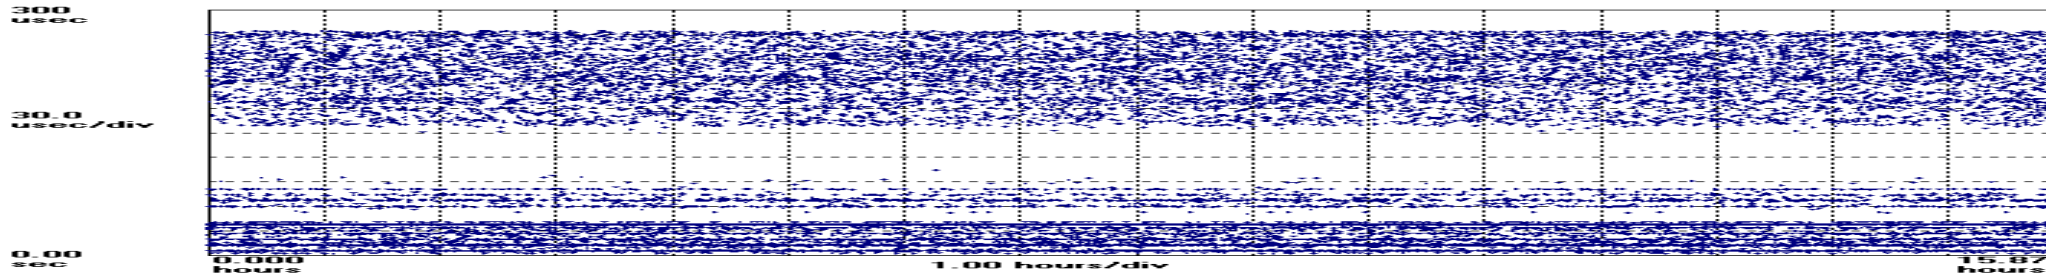


Packet  
Delay  
Sequence

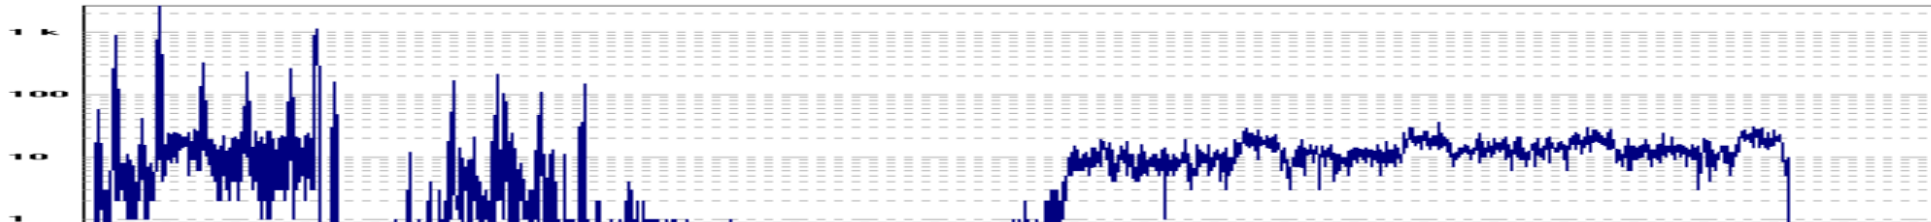

PDF

Minimum: 1.904297 usec      Mean: 96.71927 usec  
Maximum: 275.2441 usec      Standard Deviation: 97.34 usec  
Peak to Peak: 273.3 usec      Population: 28561      Percentage: 100.0%


Statistics

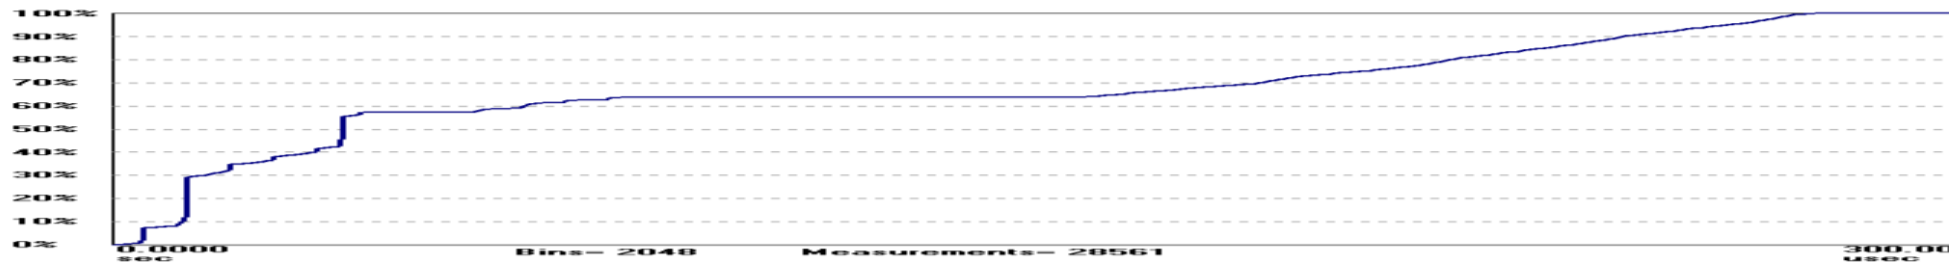

CDF

50 pct: 37.65 us; 90 pct: 245.5 us; 95 pct: 261.9 us; 99 pct: 272.3 us; 99.9 pct: 274.5 us

# Time Accuracy and Stability Requirements

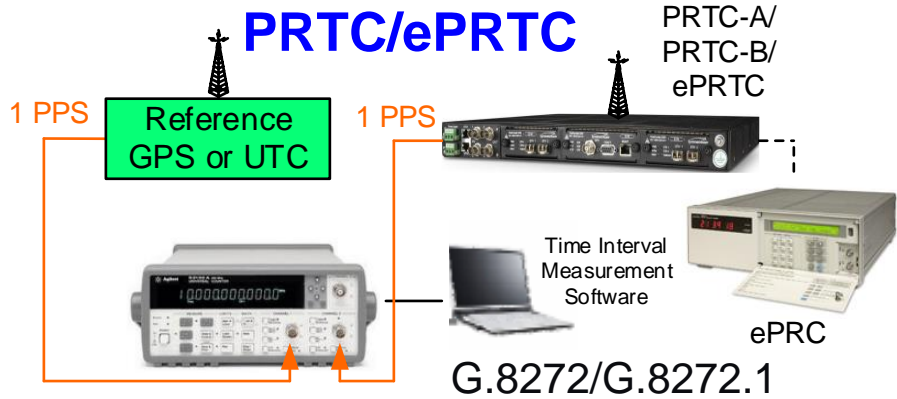

## Time Accuracy

Time Error:


- $\leq 100$  ns (PRTC-A)
- $\leq 40$  ns (PRTC-B)
- $\leq 30$  ns (ePRTC)

MTIE


## Time Stability

MTIE (PRTC-A) is G.811 with 100 ns maximum  
TDEV (PRTC-A) is G.811 exactly

TDEV

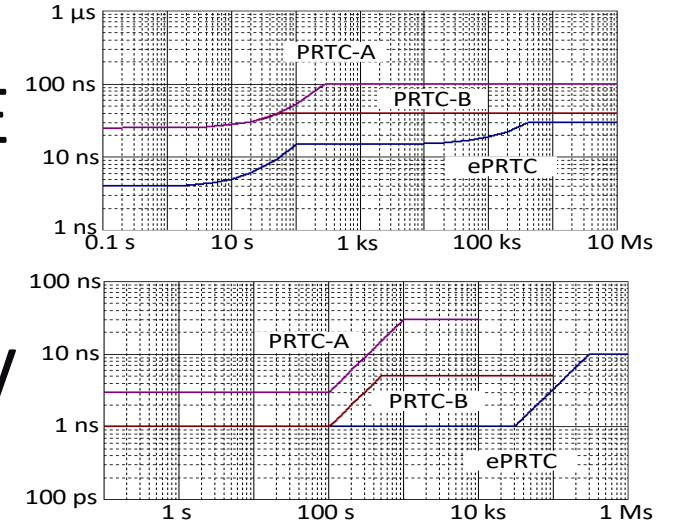

## Packet Network Limits

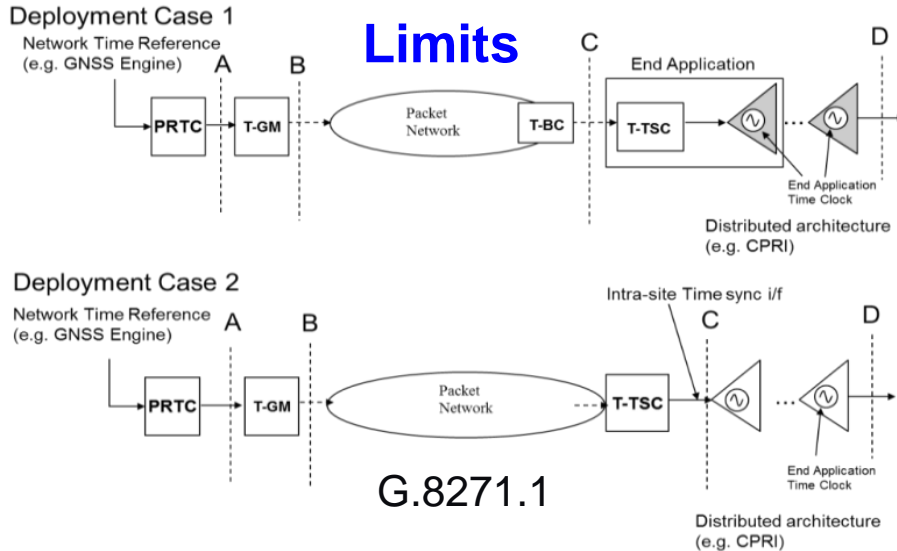

A: Time Error:  $\leq 100$  ns

C: Time Error:  $\leq 1.1$   $\mu$ s

# Time Transport: Two-Way Metrics

## Packet Time Transport Metrics

*MeanPathDelay:*  $r(n) = \left(\frac{1}{2}\right) \cdot [R(n) + F(n)]$

*TwowayTimeError:*  $\eta_2(n) = \left(\frac{1}{2}\right) \cdot [R(n) - F(n)]$

*pktSelectedMeanPathDelay:*  $r'(n') = \left(\frac{1}{2}\right) \cdot [R'(n') + F'(n')]$

*pktSelectedTwowayTimeError:*  $\eta_2'(n') = \left(\frac{1}{2}\right) \cdot [R'(n') - F'(n')]$

*min2wayTE*  $\eta_2^m(n) = \left(\frac{1}{2}\right) \cdot [R^m(n) - F^m(n)]$

*pct2wayTE*  $\eta_2^p(n) = \left(\frac{1}{2}\right) \cdot [R^p(n) - F^p(n)]$

*cluster2wayTE*  $\eta_2^c(n) = \left(\frac{1}{2}\right) \cdot [R^c(n) - F^c(n)]$

**Ideal F/R: floor**  
("lucky" packets: fastest)

**Ideal 2way TE: zero**  
(no asymmetry)

*psTDISP (min/pct/clst time dispersion):* ps2wayTE{y} plotted against psMeanPathDelay{x} as a scatter plot

*ps2wayTE statistics:* ps2wayTE statistic such as mean, standard deviation, median, 95 percentile plotted as a function of time window tau; min/maxATE

**Weighted Average:**

$$w(n) = [a \cdot F(n) + (1 - a) \cdot R(n)] \quad \text{where } 0 \leq a \leq 1$$

# Time Transport: Two-Way Packet Delay

Forward Packet Delay Sequence

#Start: 2019/03/06 17:15:30

0.0000,	1.47E-6
0.1000,	1.54E-6
0.2000,	1.23E-6
0.3000,	1.40E-6
0.4000,	1.47E-6
0.5000,	1.51E-6

Reverse Packet Delay Sequence

#Start: 2019/03/06 17:15:30

0.0000,	1.11E-6
0.1000,	1.09E-6
0.2000,	1.12E-6
0.3000,	1.13E-6
0.4000,	1.22E-6
0.5000,	1.05E-6

#Start: 2019/03/06 17:15:30

0.0000,	1.47E-6,	1.11E-6
0.1000,	1.54E-6,	1.09E-6
0.2000,	1.23E-6,	1.12E-6
0.3000,	1.40E-6,	1.13E-6
0.4000,	1.47E-6,	1.22E-6
0.5000,	1.51E-6,	1.05E-6

Two-Way Data Set

## Minimum Search Sequence

Constructing  $\hat{f}$  and  $\hat{r}$  from  $f$  and  $r$  with a 3-sample time window

Time(s)	$f(\mu s)$	$r(\mu s)$	$\hat{f}(\mu s)$	$\hat{r}(\mu s)$
0.0	1.47	1.11		
0.1	1.54	1.09	1.23	1.09
0.2	1.23	1.12		
0.3	1.40	1.13		
0.4	1.47	1.22	1.40	1.05
0.5	1.51	1.05		


min2wayTE

$$\eta_2'(n') = \left(\frac{1}{2}\right) \cdot [R'(n') - F'(n')]$$


Time(s)	min2wayTE( $\mu s$ )
0.1	-0.07
0.4	-0.18

# Time Transport: Two-Way Metrics

2wayTE

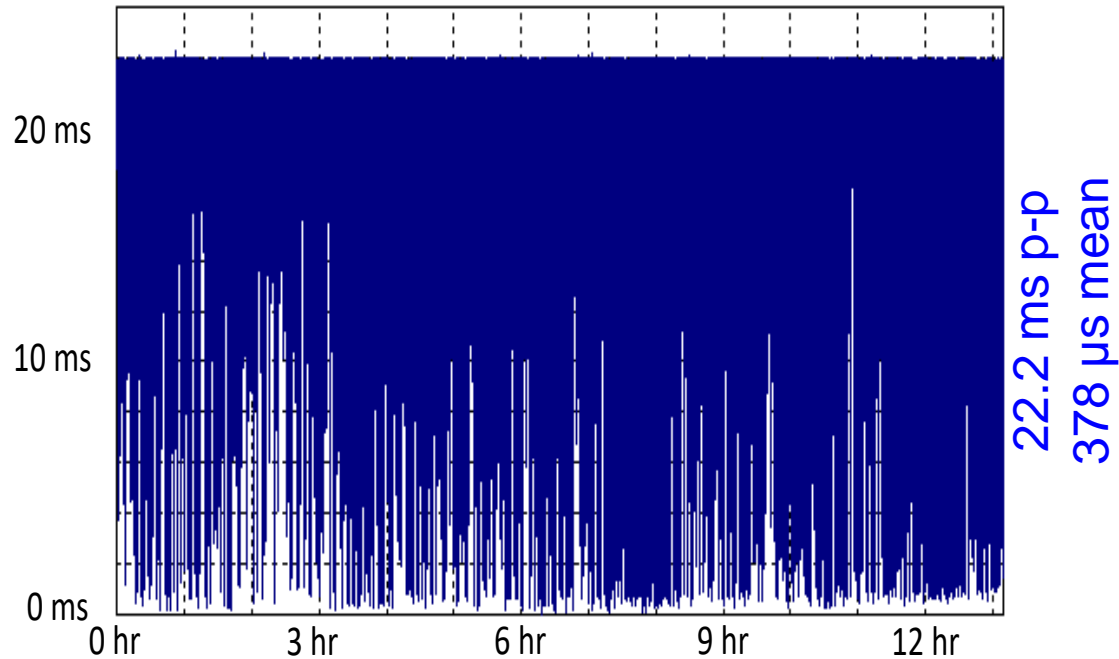

pktSelected2wayTE

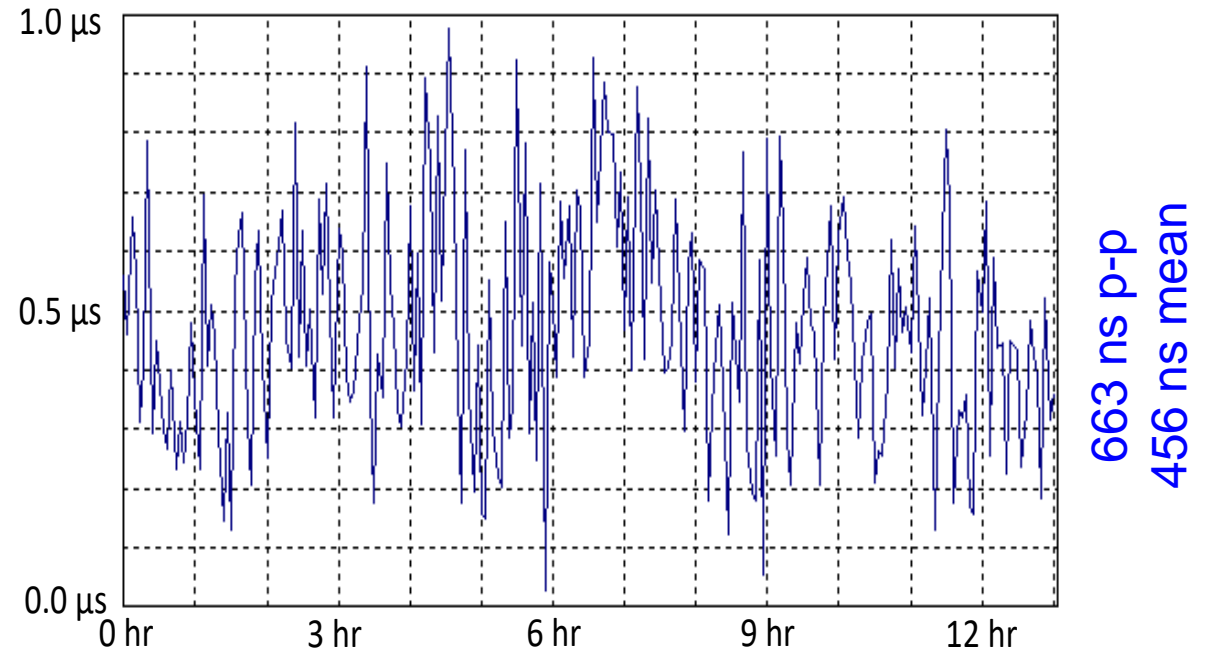


Both 2wayTE and pktSelected2wayTE plots with minimum set to 0. Mean value from unadjusted data.

Selection window = 200s  
Selection percentage = 0.25%  
Peak-to-peak pktSelected2wayTE = 663 ns  
(G.8271.2 APTS limit: <1100 ns)


# Two-Way Time Error ↔ Network Asymmetry

## Asymmetry in Wireless Backhaul

(Ethernet wireless backhaul asymmetry and IEEE 1588 client 1PPS under these asymmetrical network conditions)

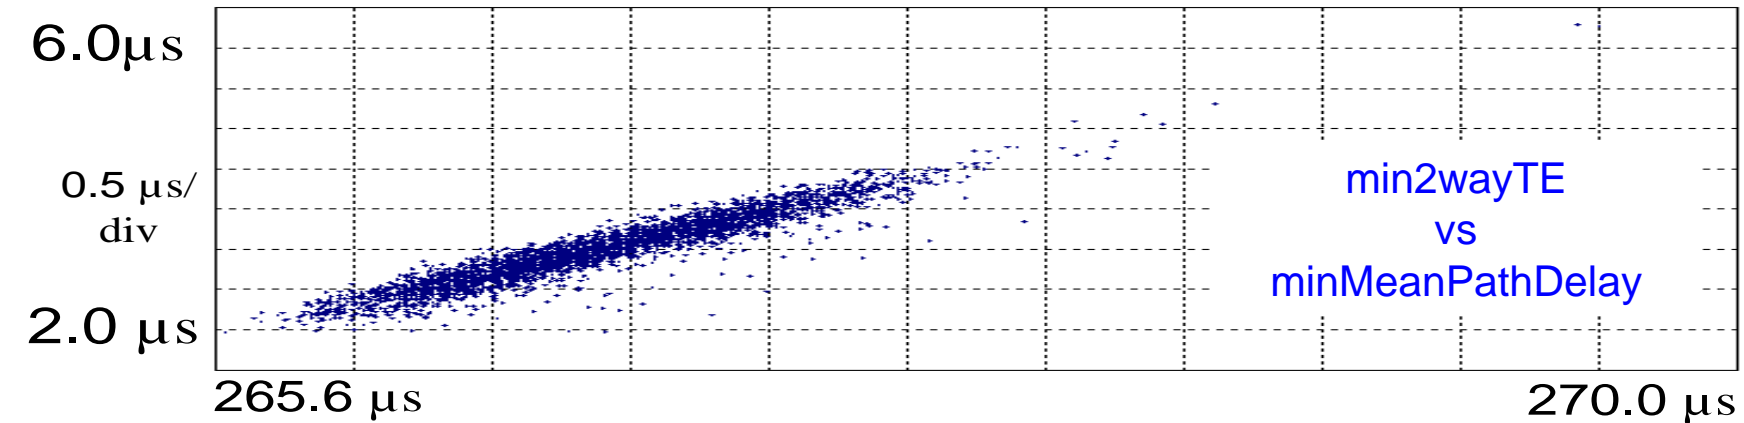

Min  
TDISP

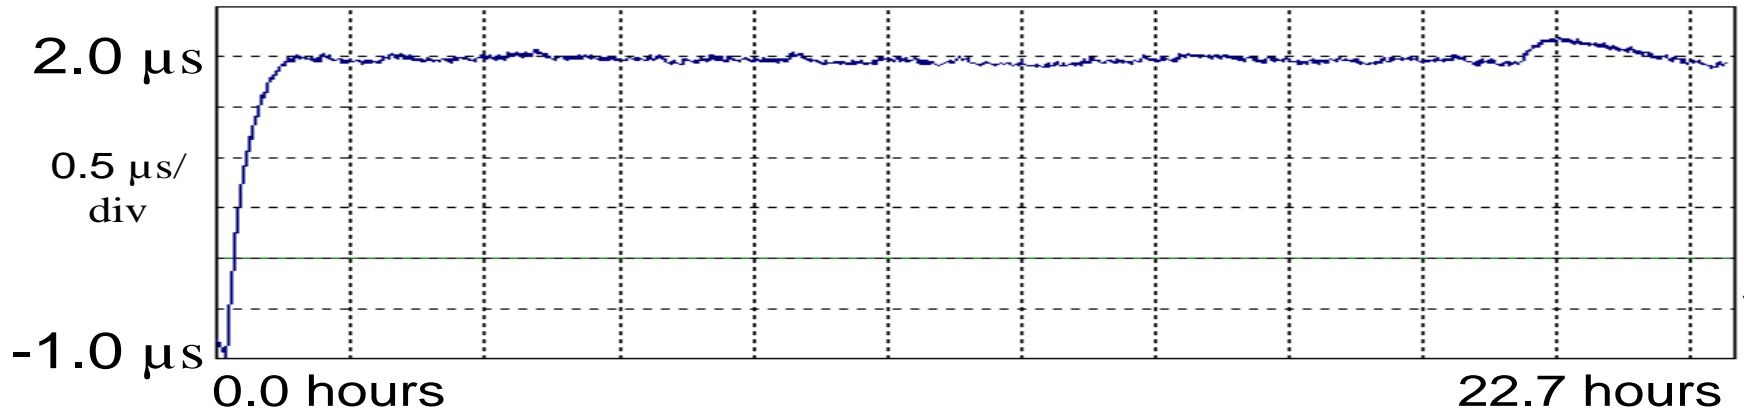


1588  
Client 1PPS  
vs. GPS



# Network Asymmetry

## 150 km fiber PTP over OTN transport

(2wayTE is 19.1  $\mu$ sec which represents the 38.2  $\mu$ sec difference between forward and reverse one-way latencies)

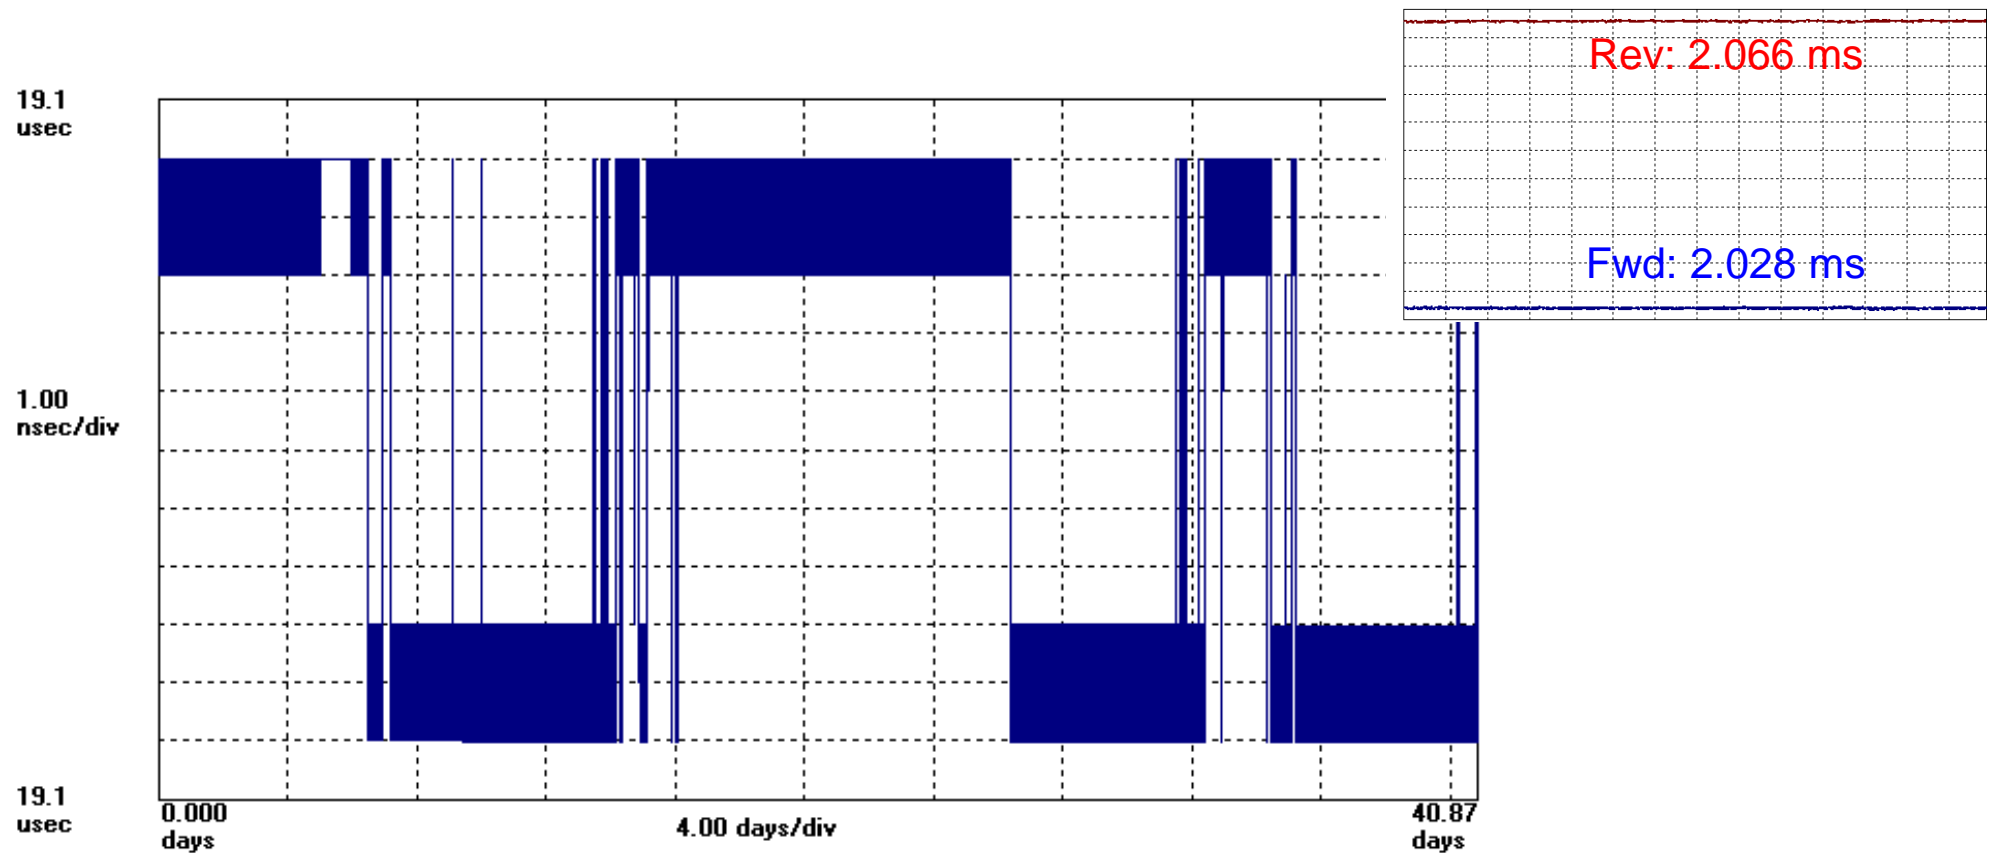

# Summary

- **PDV frequency measurements only require a stable reference**
- **PDV time measurements require common time scale reference at both ends of the network being studied (GNSS at both ends is a way to do this)**
- **For frequency transport, asymmetry doesn't matter, and one, the other, or both packet flows can be used**
- **Asymmetry is everywhere, asymmetry is invisible to the IEEE 1588 protocol, thus asymmetry has a direct bearing on the ability to transport time precisely**
- **The “two-way time error” calculation is a direct measure of asymmetry**
- **There are two ways to assess time transport: (1) measuring a 1 PPS reference at the node being studied and (2) measuring a packet signal at the node being studied**
- **Packet metrics for time transport must use both forward and reverse streams together rather than separately as is the case for frequency transport**
- **Packet metrics for time transport can make use of much of the methodology used for packet frequency transport metrics**

# Thank you

---

**Lee Cosart**

Research Engineer

[lee.cosart@microchip.com](mailto:lee.cosart@microchip.com)

Phone: +1-408-428-7833