

ELECTRONICS & DEFENSE

Bringing High-Accuracy to Datacenter in a Scalable Way


March 2023



Benefits of Precise Time in Datacenters

Coherency

- Ensure that the data are the same on distributed devices
- Reduce the number of data replicas

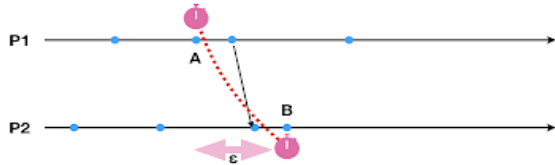

Efficiency

- Pre-schedule tasks to handle known low latencies
- Pipelined assignments to improve efficiency
- Reduce overload to ensure coherency (ϵ uncertainty bound)





Reduce CPU cycles and energy costs

Visibility


- Have a clear view of the real order of events
- Measure latency to control bottlenecks
- Carefully allocated resources to avoid any problems

About Precise Time in Datacenters

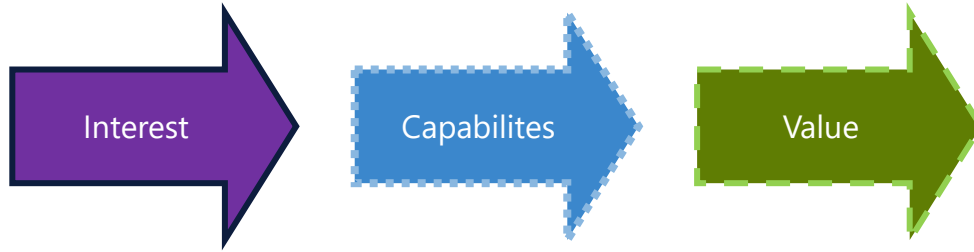



Latency is one of the fundamental value

Using time requires software modification
> new layers must be written

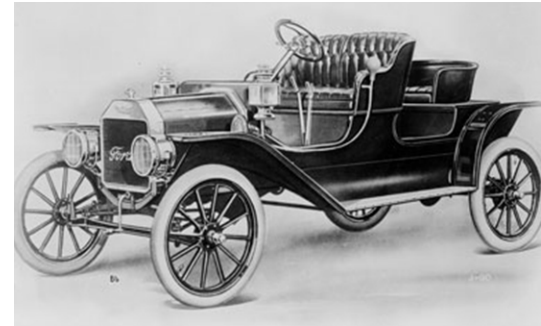

*"If I had asked people **what they wanted**,
they would have said **faster horses.**"*
- Henry Ford (?)


Bringing High Accuracy To Applications

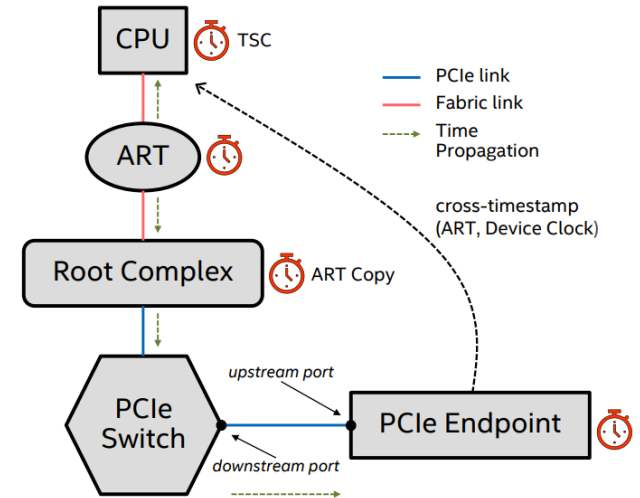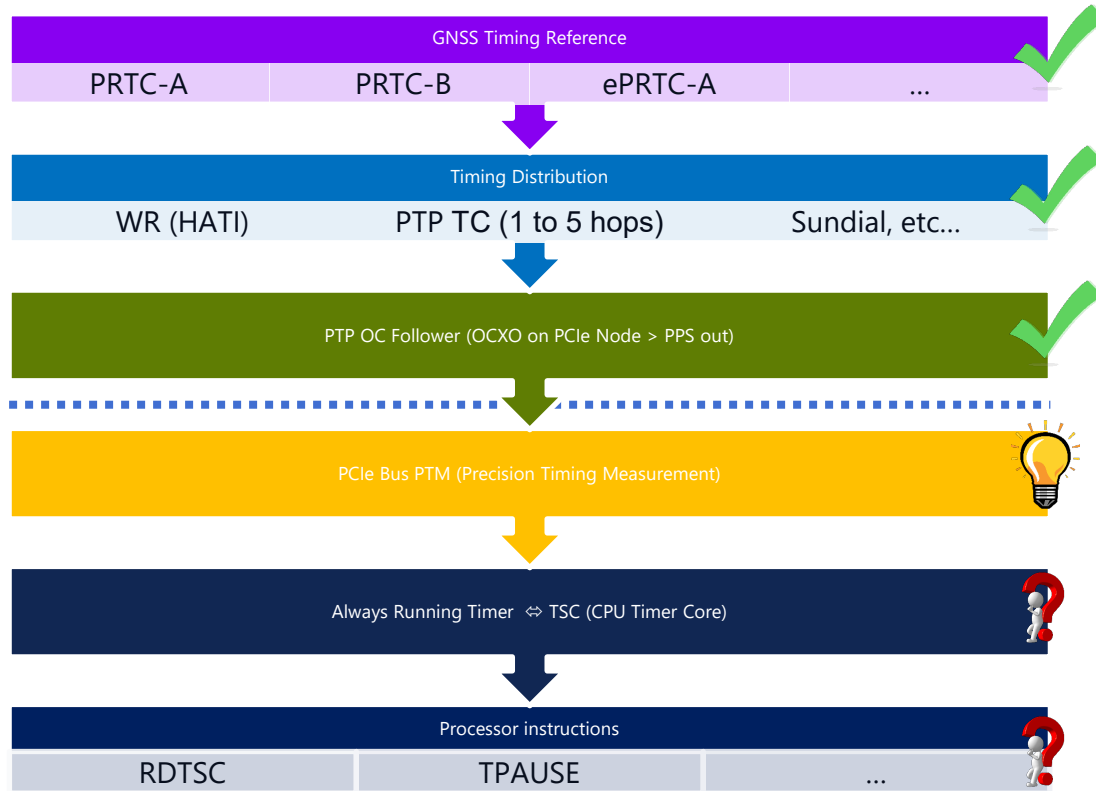

[PCIe PTM: Timing in the Last Inch, Intel, OCP-TAP](#)
[Precise Time Application, Intel, OCP-TAP](#)

Reference Architectures


1. Cisco 3-levels leaf/spine

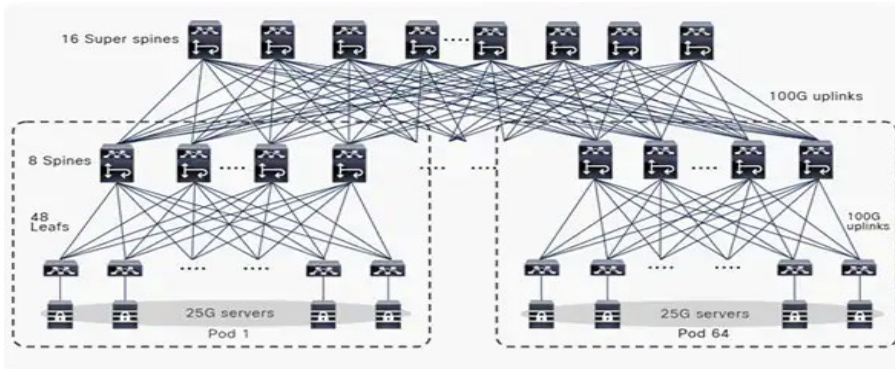

Source: Cisco, Massively scalable data center network fabric

- 1 building
- 16 superspines
- 64 pods → 48 x racks/pod
- ~140K server/DC

2. Meta DC-Fabric (F16)

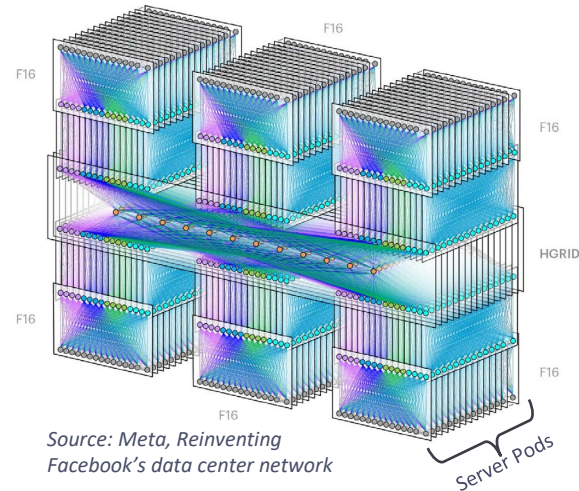

Source: Meta, Reinventing Facebook's data center network


- 1 Region → 6 buildings (F16)
- 16 fabric planes
- 48 pods → 48 x racks/pod
- ~100K servers/DC → ~600K servers/region

Reference POD Architecture for DC Profile

4x Open Time Servers
with ART+NIC cards (GM) per pods



- + Simple solution to put in place
 - Reduce the number of hops
 - GM handles between 5-15K clients
- Many GNSS receivers to handle
 - Complex RF installation: Splitter, Amplifiers
 - Many references can diverge $\pm 100\text{ns}$ + calibration issues

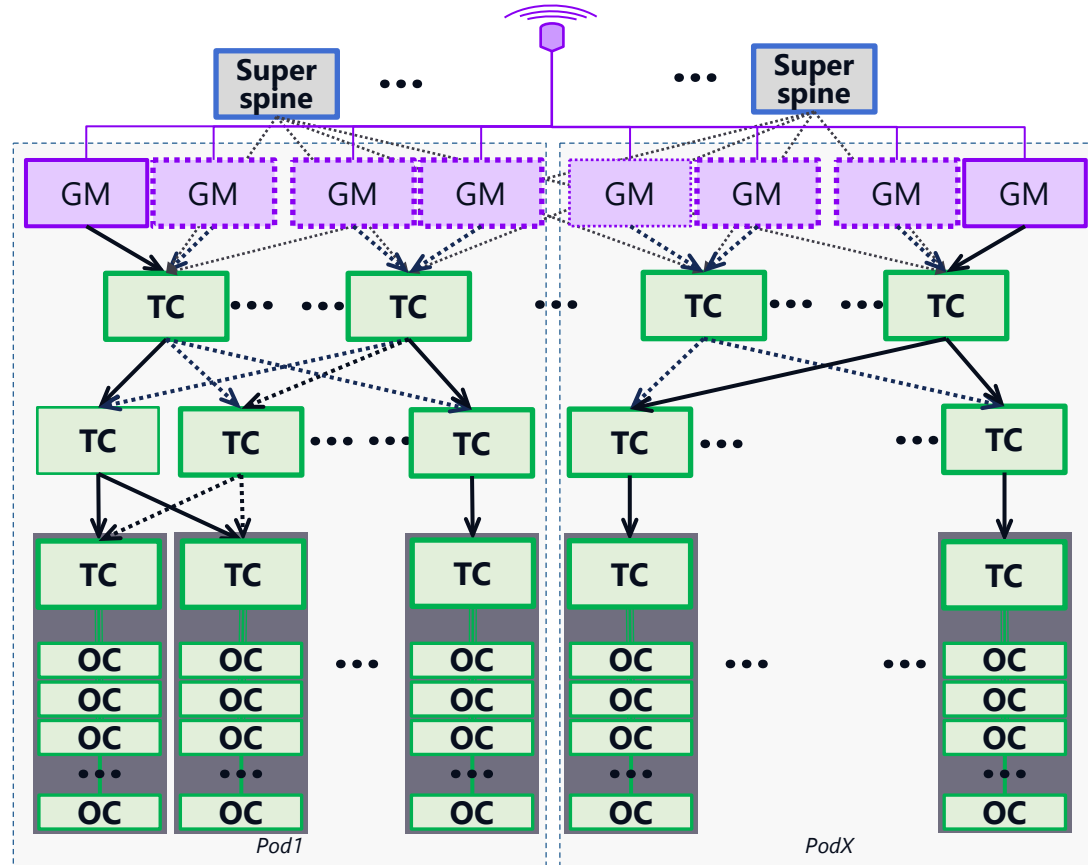


White Rabbit for Time Servers

Using WR at the core of DC to synchronize all PTP GM (Open Time Server) at each pods




- + Simple solution to put in place
 - Reduce the number of hops
 - GM handles between 5-15K clients
- + Sharing a common clock (<1ns accuracy)
 - Linked clocks increase resiliency and accuracy
 - Solution for intra-DC and inter-DC
 - Only 1 or 2 GNSS receivers to install
 - Relative accuracy is reduced by ± 100 ns

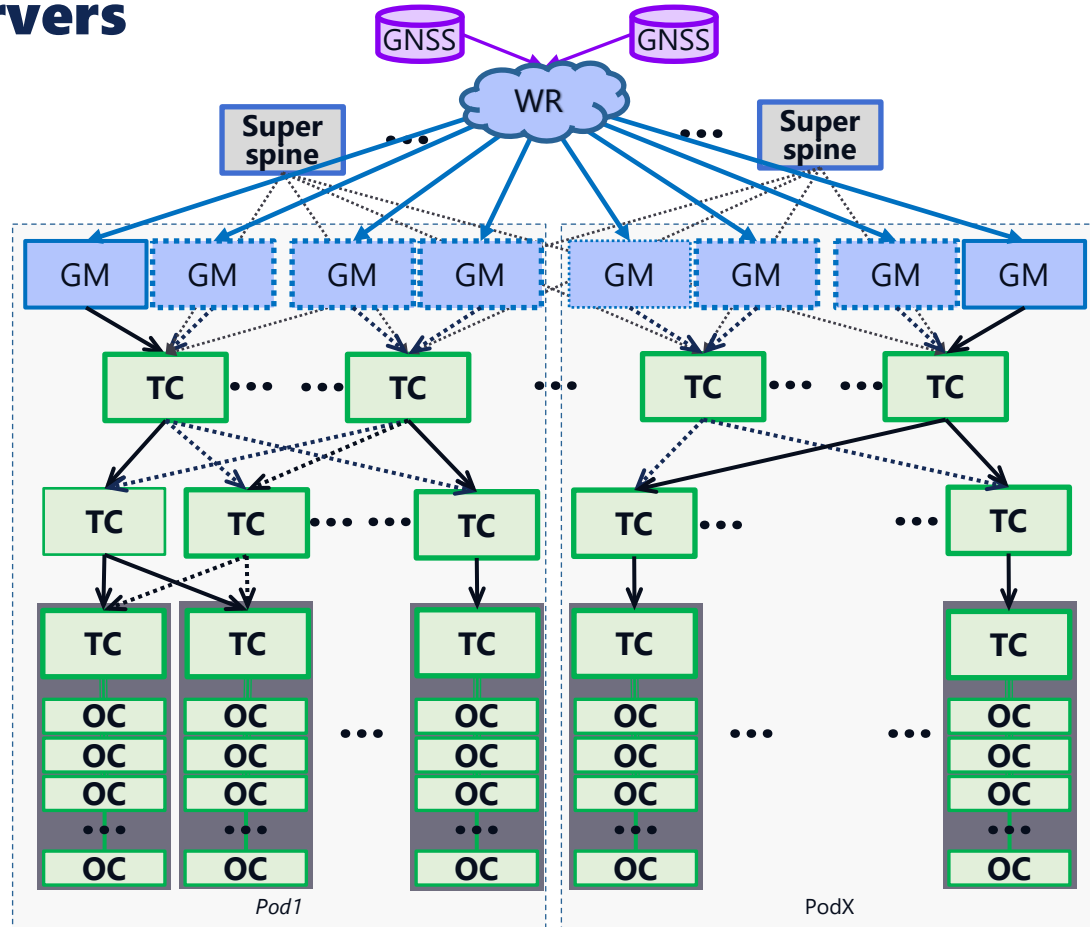

Inter Datacenters Triangles

- Multiple GNSS compared through WR links
- Voting mechanism to select the most reliable reference
- Metro-area connection using DWDM links

Check our poster on resilient²PNT for more details

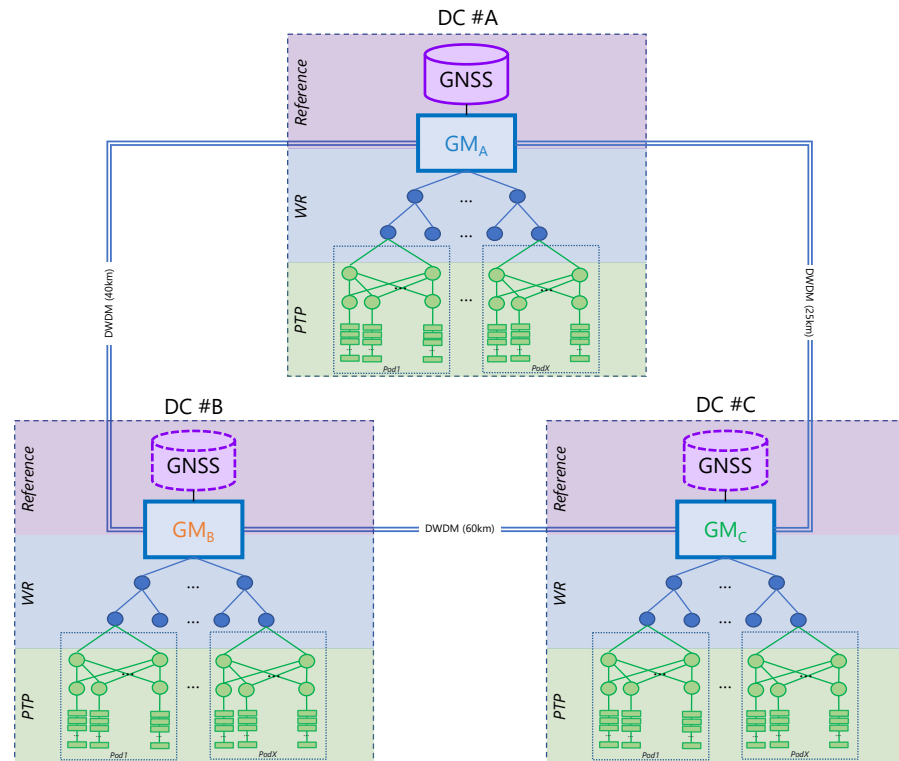

PTP TC vs PTP BC vs WR BC

PTP TC is preferred over PTP BC in datacenter



- **PTP BC**
 - Each hops introduce an error that is propagated
 - Behaves differently depending on servo and OXCO





- + **PTP TC for spine/leaf/TOR switches**
 - Simple to process, no need of specific HW
 - Well supported by more manufacturers

- **PTP TC**
 - Scalability concerns



- + **WR BC**
 - Few picoseconds error introduced by each hop
 - Allows sharing common clock until a specific point and then scales

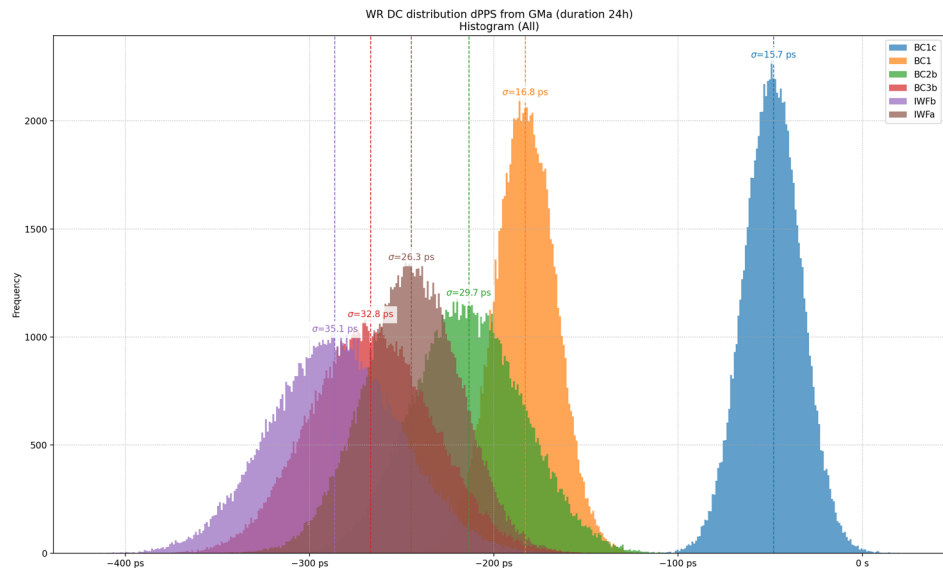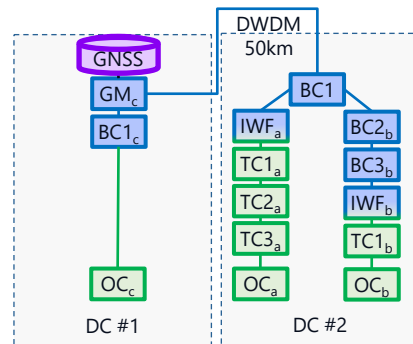


High Accuracy (WR) Down to TOR

Timing network and data network are independent down to TOR that works as BC receiving HA (WR) but transmitting PTP




- Accuracy @ TOR BC < 1ns
- Only 1 hops PTP
 - Accuracy @ OC Server → 10's ns
- Few PTP clients (<50) for TOR BC
- Resilient solution
- OC NIC can be very basic
- Adding a parallel timing network

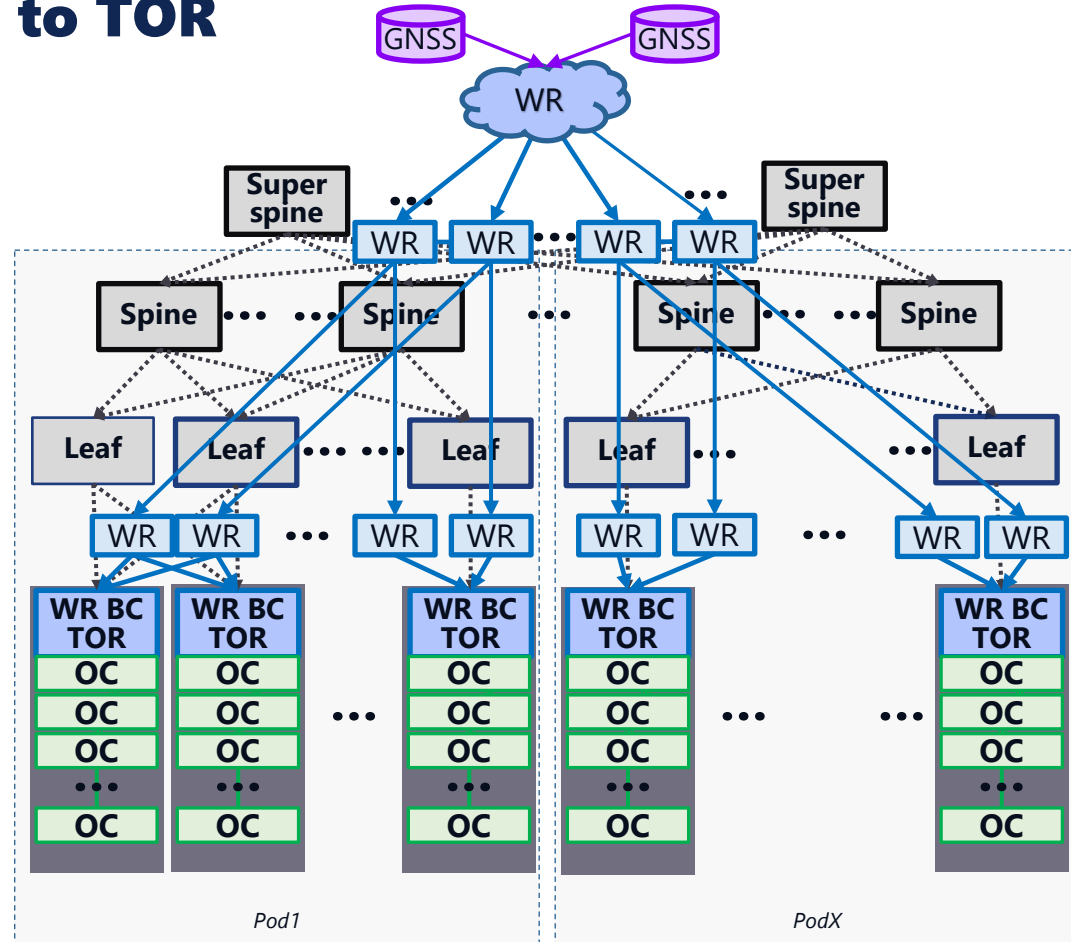

Time Budget Optimization


- Improving accuracy for timing distribution increases holdover budget and thus to enhance resiliency
- Through WR a common clock is shared among the DC and thus it allows to:
 - Remove PTRC-A time-error.
 - Dedicate Holdover budget to final OC node

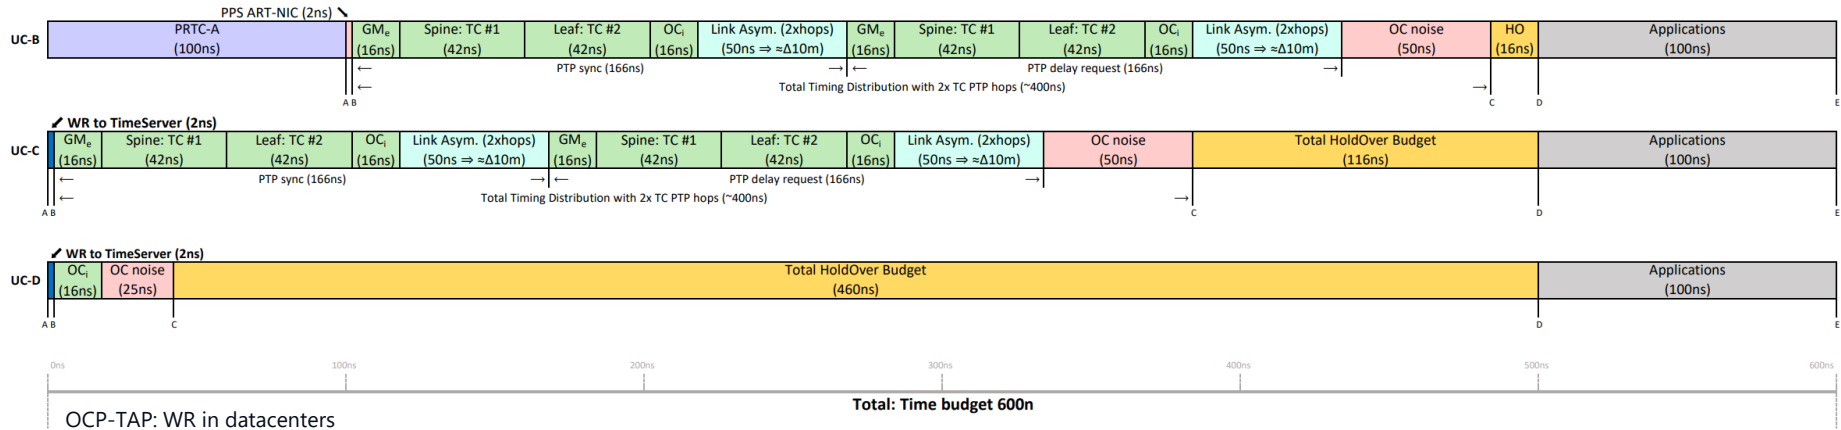

Supervision Network

Using **WR as ground-truth** to monitor the timing distribution PTP DC Profile

- A well-tested, reliable and deterministic sub-nanosecond accuracy allows one to properly monitor other timing distribution systems. Otherwise, a timing distribution network could be degraded without knowing it.
- Inserting distributed "WR probes" at strategic points allows one to measure the timing performance of "PTP distribution" network in real-time and act in case of unexpected behaviour.

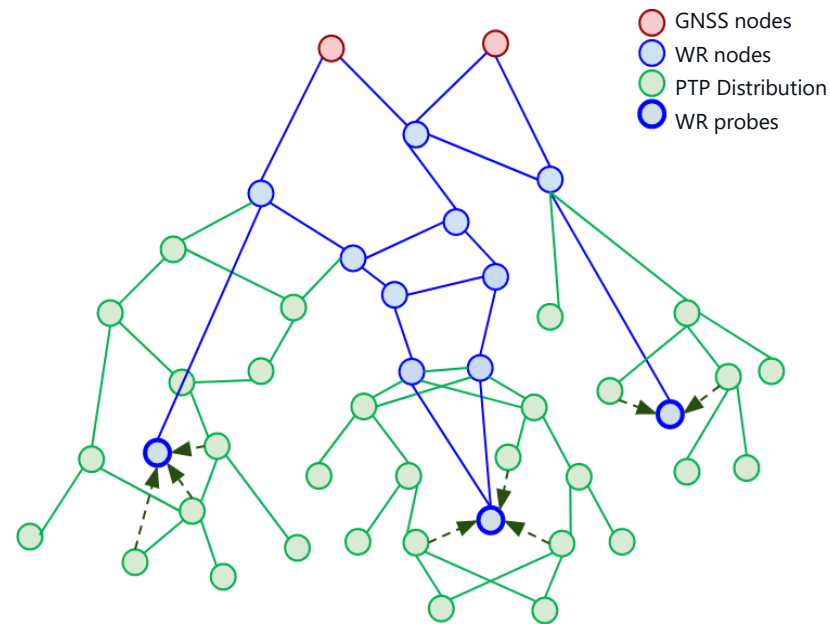

Wrap Up

Linking GNSS

The accuracy of WR allows to connect and compare GNSS receiver between them to detect abnormal behaviour. It also reduces the number of GMs.

Increase Holdover budget

By consuming negligible timing-budget with WR and reducing the number of PTP hops, the reliability is increased thanks to longer holdover budget.

Supervision Network

Real-time multi-source timing comparison benefiting from the accuracy of WR. It allows to improved traceability and resiliency.

Future proof solution

Targeting ultra-accurate & reliable timing allows to prepare for future applications needing smaller but still undefined error-bound (ϵ).

**POWERED
BY TRUST**
